

# Batten

BA-00001, BA-00002, BA-00003, BA-00004



LIGHT FORMS

Batten

## Specification



## Features

IP65 vapour tight

Integral driver

Class 1

120° homogenous beam angle

Polycarbonate Cover

Lifetime of 50,000hr


Operating temp minus 10°C to 40°C

200-240VAC

Photometry and additional documentation at:  
[LightForms.com/products/batten/Batten 150 Surface/](https://LightForms.com/products/batten/Batten%20150%20Surface/)

# Batten 1200

LIGHT FORMS

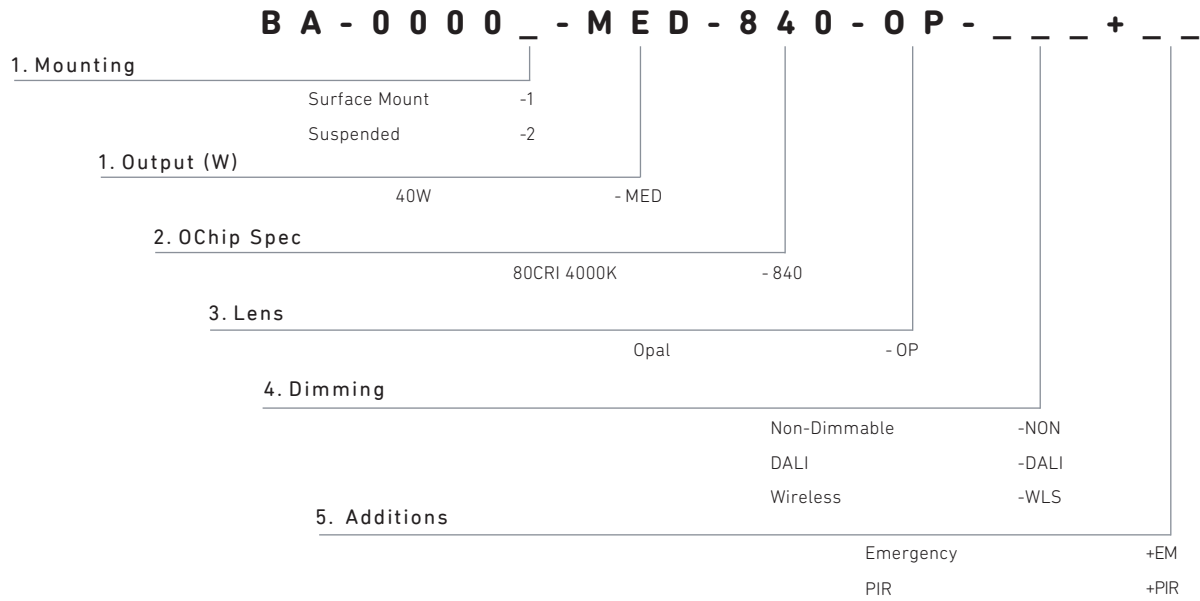


## Performance Data

Output Options	Max Delivered Lumens LM	Watts W*3	Efficacy LM/W	CCT Options
80CRI 4000K	4239	41	104	4000K

L80 > 50,000 hours  
Luminous flux +/- 5%

### Distribution



120°

### Operating temperature

Ta Max 40°C

### Warranty

5-year fixture warranty.

### Manufacturing & certification

Products are manufactured in and comply with the health, safety and environmental protection standards of the respective region in which they are sold.



Europe




United Kingdom



Greater India and Middle East

## Dimensions

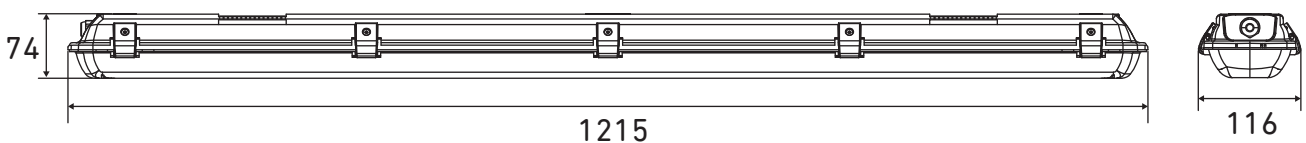

LightForms.com  
Page 2


Europe@  
LightForms.com

Asia@  
LightForms.com

Manchester@  
LightForms.com

# Batten 1500

LIGHT FORMS

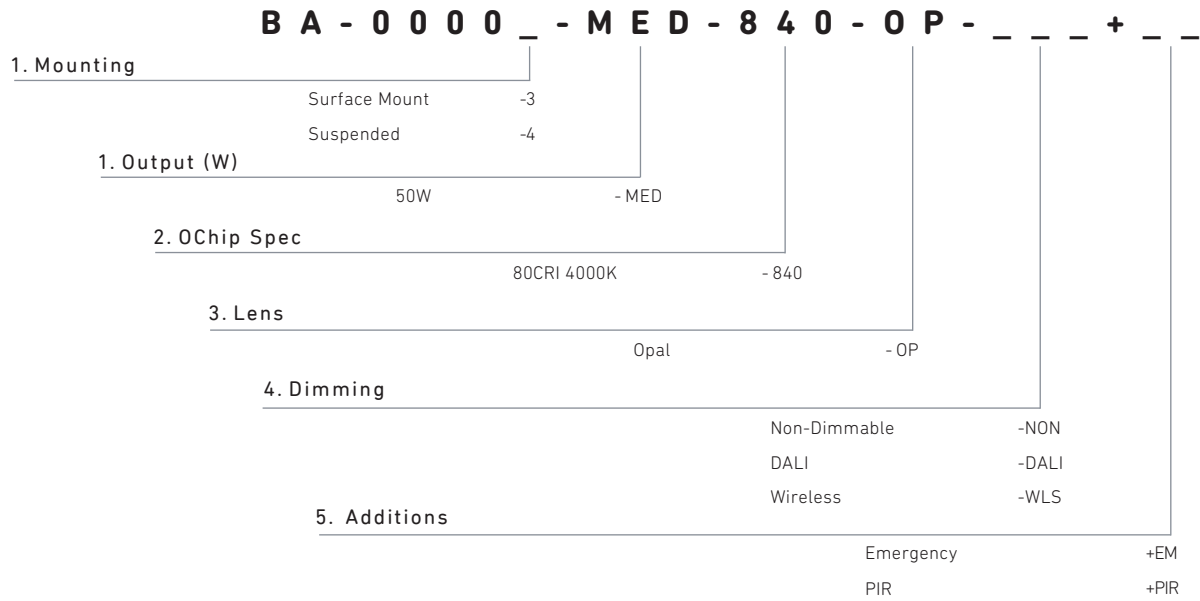


## Performance Data

Output Options	Max Delivered Lumens LM	Watts W*3	Efficacy LM/W	CCT Options
80CRI 4000K	5233	53.5	97.8	4000K

L80 > 50,000 hours  
Luminous flux +/- 5%

### Distribution



120°

### Operating temperature

Ta Max 40°C

### Warranty

5-year fixture warranty.

### Manufacturing & certification

Products are manufactured in and comply with the health, safety and environmental protection standards of the respective region in which they are sold.



Europe




United Kingdom



Greater India and Middle East

## Dimensions

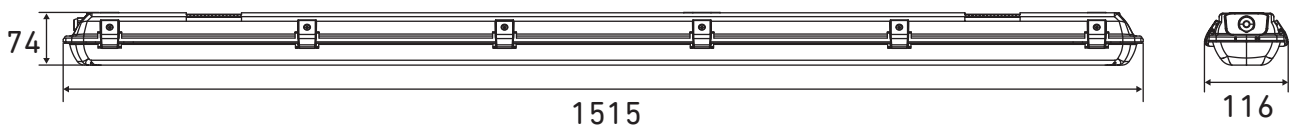

LightForms.com  
Page 3

Europe@  
LightForms.com

Asia@  
LightForms.com

Manchester@  
LightForms.com