


# EM Exit Track

EM-00009

315mm x 223mm x 46mm




LIGHT FORMS

Emergency

## Specification



## Track Mount



## Features

Available in black and white.

Main body is polycarbonate.

Clear acrylic LGP.

PET pictogram.

Mounting options include Ceiling Surface mounted, Ceiling Recessed, Suspended, Wall mounted and Track Mounted.

Up, Down and Left/Right pictogram options.

30m visibility.

Class II


CCT - 5000K

CRI - >70

LiFePO4 6.4V 600mAh battery.

0°C to 45°C operating temperatures.

## Dimensions

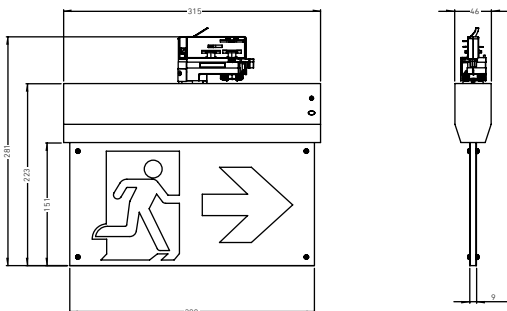

Photometry and additional documentation at:  
[LightForms.com/products/emergency/EM Exit Track/](https://LightForms.com/products/emergency/EM%20Exit%20Track/)

LightForms.com

Page 1

Europe@  
LightForms.com

Asia@  
LightForms.com

Manchester@  
LightForms.com

# EM Exit Track

LIGHT FORMS

EM-00009

**EM - 00009 - - - 01 - 750 - - - - -**

**1. Finish Options**

White - WH  
Black - BK

**2. Nominal Power Options**

1W - 01

**3. Chip Options**

70CRI 5000K - 750

**4. Pictogram Options**

Left and Right - LR  
Up Arrow - UP  
Down Arrow - DN


**5. Testing Options**

Auto Test - AUT  
DALI - DAL

## Electrical Specification

Input Power (MAX)	3W
Frequency	50/60Hz
Input Voltage	200-240V
Discharge Efficiency	≥70%
Output Power	1.8W ± 0.3W
Power Factor	≥0.3%
Rated Input Current	≥0.03A
Full Load Output Voltage	DC 2.8-3.2V
Output Current Range	580mA ±10%
Surge	0.5KV
Withstand voltage	AC3750V
Short Circuit Protection	Pass
Over voltage protection	Pass

### Distribution



120°

### Operating temperature

Ta Max 45°C

### Warranty

5-year fixture warranty.  
3-year battery warranty.

### Manufacturing & certification

Products are manufactured in and comply with the health, safety and environmental protection standards of the respective region in which they are sold.



Europe



United Kingdom



Greater India and Middle East

LightForms.com

Page 2

Europe@

LightForms.com

Asia@

LightForms.com

Manchester@

LightForms.com