LP2.5-LED 62mm x 80/85mm



LIGHT FORMS

Linear

Features

corners.

available.

available.

62mm wide profile.

configured shape.

Individual, continuous run, or

Expertly cut and welded mitered

Available in a large range of standard RAL powdercoat finishes as well as a considerable range of premium metallic finishes.

Indirect distribution options

The Lightplane 2.5 is a sleek, versatile luminaire designed for various applications, offering direct, indirect, or direct-indirect illumination. It can be suspended, wall-mounted, or surface-mounted, it can be fitted with a 3 circuit or DALI track adaptor, and it can be used within a wide array of suspended ceiling systems.















LightForms.com Europe@ Page 1 LightForms.com

Asia@ LightForms.com

Manchester@ LightForms.com

Flush diffusers with integrated reflector or Drop diffuser options available. PMMA or Polycarbonate V0 diffuser

options. Matt Diffuse and Microprismatic

options available. 4 standard output options available.

High-quality light with <1% output

Tuneable White and RGBW options

DALI, DMX, 1-10V, wireless dimming control options.

Integral emergency. Integral spotlights upon request. Integral proximity sensors upon request.

MacAdam 3-step LEDs.

L80 > 50,000hrs at 25°C Ta.

LIGHT FORMS

Product Options

Mounting Options

Vertical Suspended Rod Suspended Wall Mount Suspended Ceiling Surface Mount Track Mount

Shape Options

Straight
Square
Rectangle
L shape
Cross
T Shape
U Shape
Z shape

CRI Options

Custom Shape

80CRI 90CRI

CCT Options

2700K 3000K 3500K 4000K

Control Options

Non Dimmable DALI 1-10V DMX Wireless

Direct Output Options @ 80CRI 4000K

Minimum (10W) - 1372lm/m
Low (14W) - 2041lm/m
Medium (25W) - 3628lm/m
High (48W) - 6174lm/m
Tuneable Low
Tuneable Medium

In-Direct Output Options @ 80CRI 4000K

Minimum(10W) - 1185lm/m
Low(14W) - 1763lm/m
Medium(25W) - 3135lm/m
High(48W) - 5336lm/m
Tuneable Low
Tuneable Medium
RGBW

10211

RGBW

Lens Options

Low Glare Prismatic Flush High Effciency Prismatic Flush Opal Prismatic Flush Opal Flush Opal Drop


Additions

DALI motion sensor Standard motion Sensor BASIC 3 hour emergency DALI 3 hour emergency Flush integrated downlight Integrated adjustable spotlight Integrated track options


Click here to navigate to the online Product Configurator.




LightForms.com Page 2 Europe@ LightForms.com Asia@ LightForms.com Manchester@ LightForms.com




Direct Flush Diffuser




Direct Drop Diffuser




Direct/Indirect Flush Diffuser



Direct/Indirect
Drop Diffuser



*Drop length supplied 2500mm. Length adjustable on site.



RD -Rod Suspended

*Drop Rod length to be confirmed prior to production.

Not adjustable on site.

LIGHT FORMS


Body Colours



Light Forms also o°ers an extensive range of premium finishes, including specilist metalic finishes.



LIGHT FORMS



User adjustable sliding brackets. Allowing for on site adjustment of hanging position.



Continuous indirect output options.

LIGHT FORMS

Projects




LightForms.com Page 6

Europe@ LightForms.com Asia@ LightForms.com Manchester@ LightForms.com

LIGHT FORMS


Projects

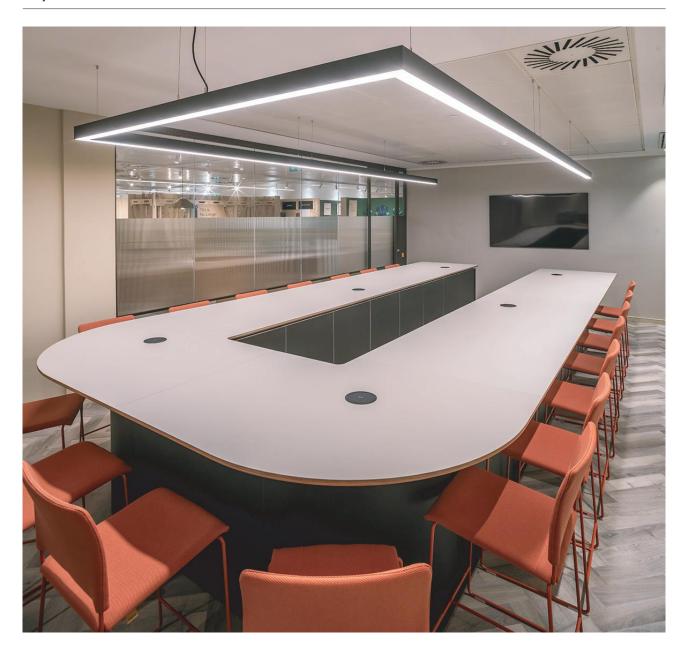

© 2024 Light Forms Ltd

LIGHT FORMS

Projects

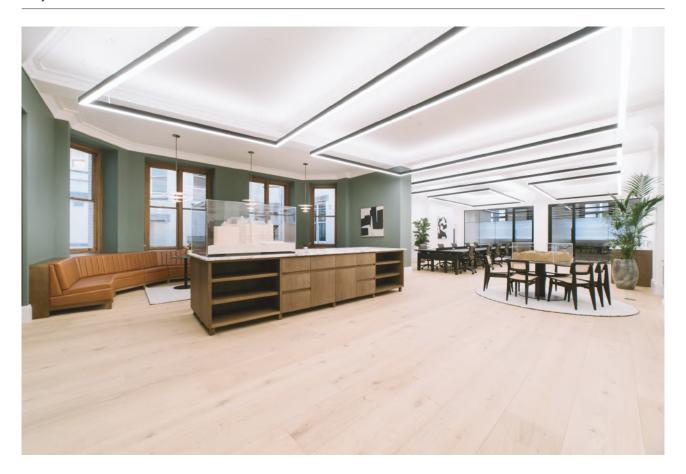

© 2024 Light Forms Ltd