


Panel 30120

PA-00004, PA-00005, PA-00006
Recessed, Suspended and Surface Mount



LIGHT FORMS

Panel


Recessed



Suspended



Surface

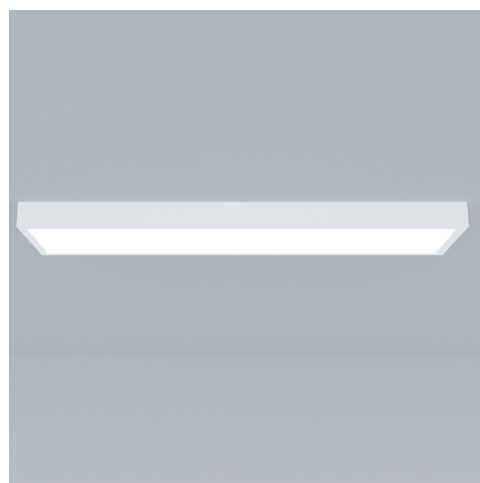

Features

Aluminium Trim (RAL9016)

Class II

Remote Driver

IP40

PMMA Lens

PS Diffuser

Lifetime of 50,000hr


Operating temp minus 10°C
to 40°C

200-240VAC

Panel 30120

LIGHT FORMS

PA - 0000 - MIN - 840 - PRIS - - - - 9010 + - -

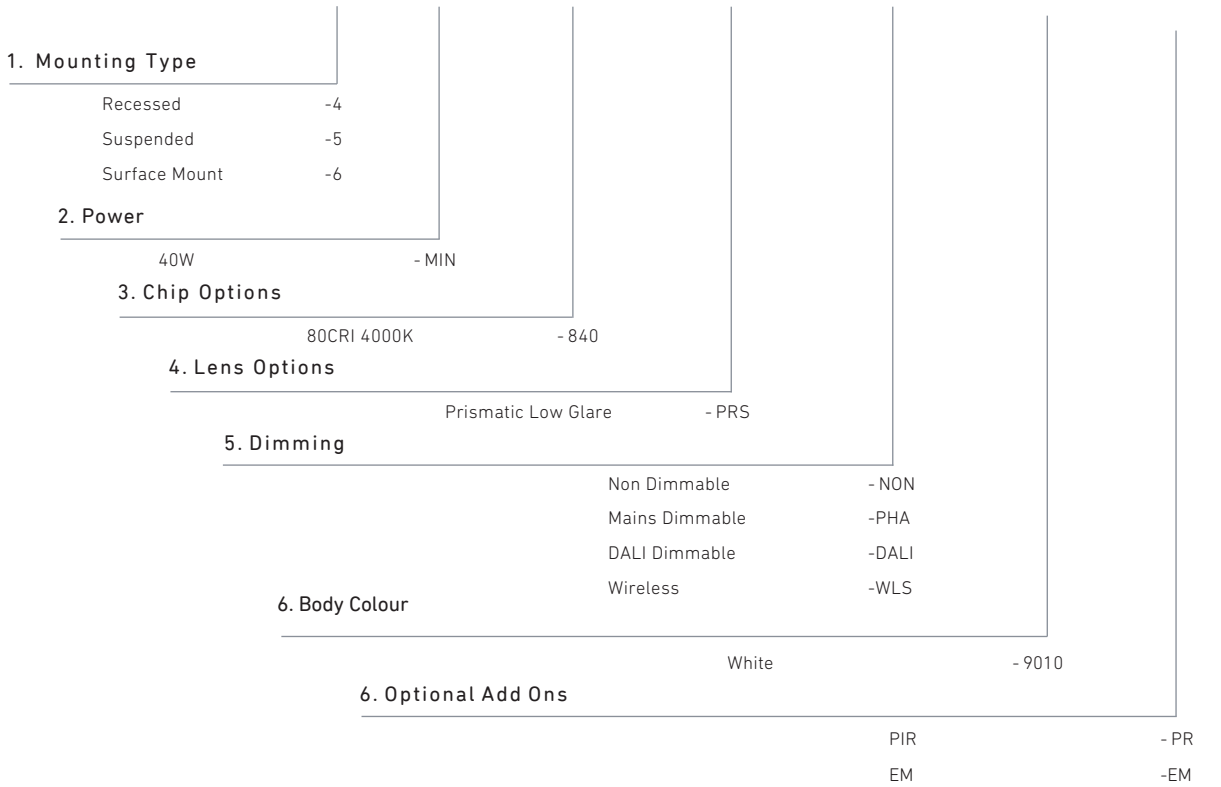


Performance Data

Output Options	Max Delivered Lumens LM	Watts W ³	Efficacy LM/W	CCT Options
80CRI 4000K	4184	42	100	4000K

L80 > 50,000 hours
 Luminous flux +/- 5%

Distribution

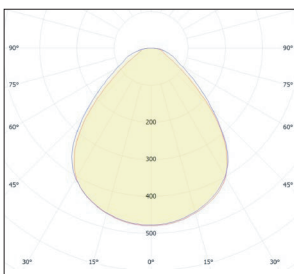

120°

Operating temperature
 Ta Max 40°C

Warranty
 5-year fixture warranty.

Manufacturing & certification

Products are manufactured in and comply with the health, safety and environmental protection standards of the respective region in which they are sold.



Europe



United Kingdom




Greater India and Middle East


Panel 30120

LIGHT FORMS


Dimensions - PA-00004 - Recessed

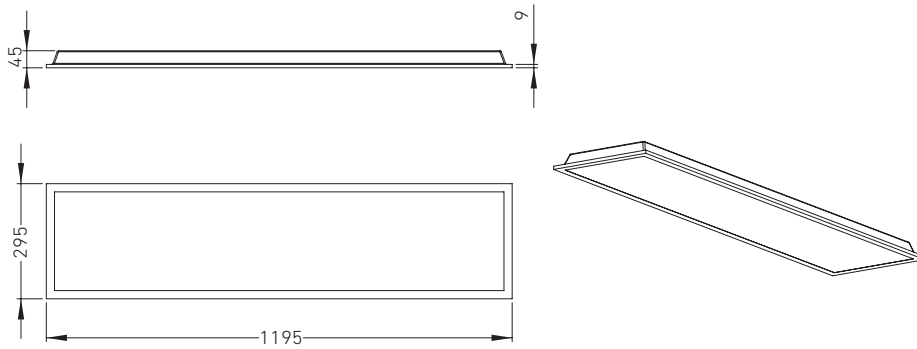

PA-00005 - Suspended

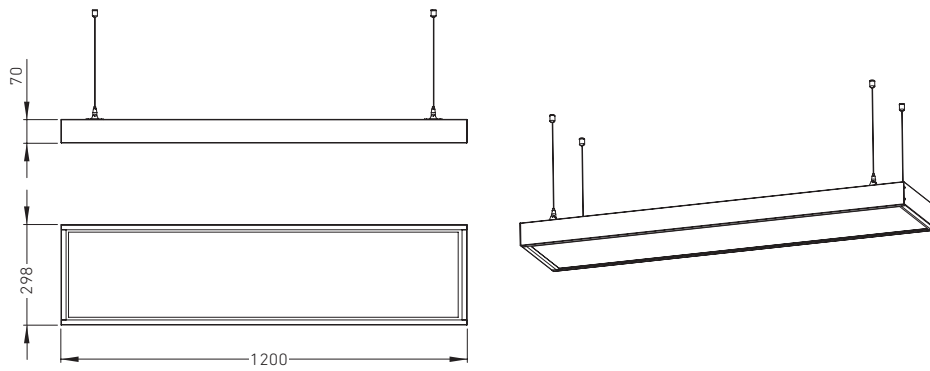

PA-00006 - Surface Mounted

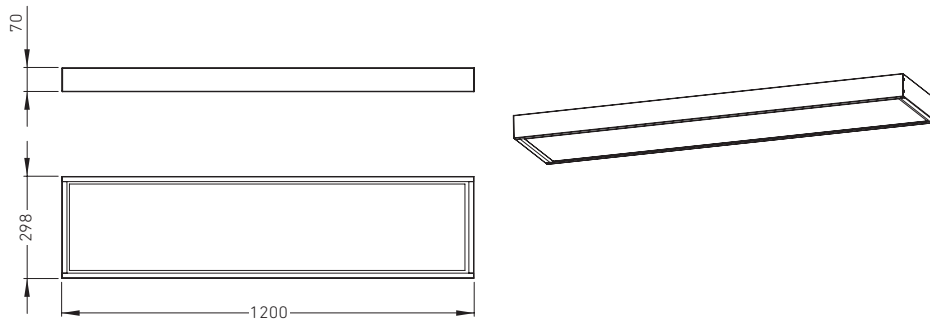

Photometry and additional documentation at:
[LightForms.com/products/panel/Panel 6060 Recessed/](https://LightForms.com/products/panel/Panel%206060%20Recessed/)